DELUXE WOK RANGE

QUEST Model CHR

The QUEST Wok Range provides the intense heat required, yet is easily controlled, efficient and comfortable to operate. Each well has a specially designed combustion chamber, which concentrates the heat on the cooking area of the wok where it is required, and eliminates the burning of food on the wok's upper rim. The woks supplied are specially designed to prevent water from entering the



combustion chamber. Ranges can also be fitted with loose wok adapters. Sturdy construction assures operators of excellent performance and durability. The QUEST Wok Range is designed to fill the requirements of most Asian restaurants, large or small.

Product Features

- Heavy gauge stainless steel on all exposed surfaces
- Constructed with heavy angle frame throughout
- Stainless steel square tube overshelf
- Lever gas valves for easy heat control
- Powerful jet burners generate instant heat
- Right hand integral sump/drain
- Deck wash down feature standard
- Standardly supplied with 22" bowls
- Approved for installation on combustible surface with a minimum clearance of 4" to the sides and 6" to back from adjacent combustible walls


Optional Features

- Higher heat per well
- Toss wok adaptors
- Boil pot
- Water fall wash down
- Water dam for deck washdown
- Custom lengths
- Custom depths



"The Quest for the Best Ends at Quest" questmetal.com

Quest- Deluxe Wok Range

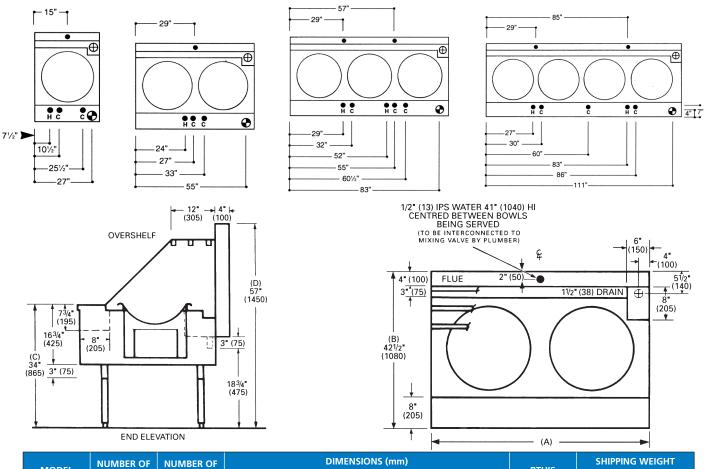

MODEL	NUMBER OF WELLS	NUMBER OF FAUCETS	DIMENSIONS (mm)				BTU'S	SHIPPING WEIGHT	
			А	В	С	D	BIUS	LBS	KGS
CHR-1	1	1	30" (760)	421⁄2" (1080)	34" (865)	57" (1450)	100,000	215	98
CHR-2	2	1	58" (1475)	421⁄2" (1080)	34" (865)	57" (1450)	200,000	430	195
CHR-3	3	2	86" (2185)	421⁄2" (1080)	34" (865)	57" (1450)	300,000	600	272
CHR-4	4	2	114" (2895)	421⁄2" (1080)	34" (865)	57" (1450)	400,000	820	372


NOTE: I.P.S. – Iron Pipe Size (female)

Mixing Valves – 1/2" (13) IPS – located 7" (180) from front edge – 22" (560) high.





- Washdown ½" (13) IPS located 7" (180) from front edge 22" (560) high.
- Gas Connection 1" (25) IPS located 4" (100) from front edge 16" (405) high. (Reversible to LH side.)
- ⊕ 1½" (38) IPS Drain 17" (430) high



NOTE: 22" Bowls are standard

	А	В	Ct	D
20" (510) Bowl	20" (510)	21½" (550)	181/8" (480)	5½16" (130)
22" (560) Bowl	22" (560)	23½" (595)	18 ⁷ /8" (480)	5% ₁₆ " (140)
24" (610) Bowl	24" (610)	25½" (650)	181/8" (480)	51/8" (150)
26" (660) Bowl	26" (660)	27½" (700)	181/8" (480)	6¾" (160)

NOTE: Dimensions are accurate at time of publication but subject to change without notice. If sizes are critical consult the factory.



QUEST Metal Products Limited 889 Erin St, Winnipeg, MB R3G 2W6 Tel: 204.786.2403 Fax: 204.783.7598 Email: sales@questmp.ca



Distributed in Canada by: Russell Food Equipment Ltd. russellfood.ca